SIMON
we create fire safety

SICO LINK FACTORY

INFORMATION

Dieser Adapter ermöglicht das gleichzeitige Ansteuern und Parametrieren des angeschlossenen SICO-fähigen PA-Antriebs, der in seinen Endlagen abgeschaltet und bestromt ist. Mit der Anschlussleitung und den Adern S / O / C1 wird der Antrieb am SICO LINK FACTORY angeschlossen. Dieser ist mit S (blau) und O (braun) mit einer externen Spannungsversorgung bzw. Zentrale verbunden.

Bevor die Verbindung zu SICO LINK hergestellt werden kann, muss der Antrieb in der Endlage „ZU“ oder „AUF“ abgeschaltet haben!

ACHTUNG

Nicht zur Verwendung mit 230 VAC Antrieben geeignet!

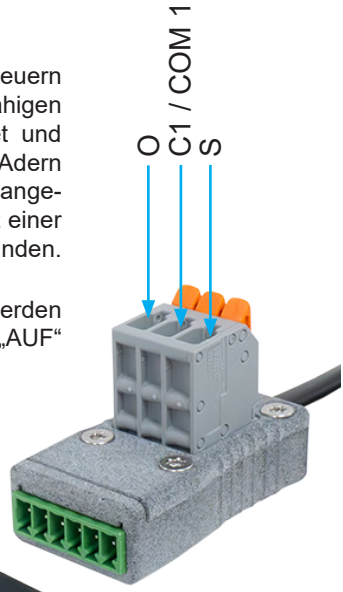

S = blau
O =braun

Copyright by SIMON PROtec Systems GmbH –
Vorbehaltlich technischer Änderungen und Irrtümer.

SICO LINK FACTORY

INFORMATION

This adapter allows simultaneous control and parameterisation of the connected SICO-capable PA actuator, which is switched off and supplied with power in its end positions. The actuator is connected to the SICO LINK FACTORY using the connection cable and the wires S / O / C1. The latter is connected with S (blue) and O (brown) to an external power supply or control unit.

Before the connection to SICO LINK can be established, the actuator must have switched off in the ‘CLOSE’ or ‘OPEN’ end position!

ATTENTION

Not suitable for use with 230 VAC actuators!

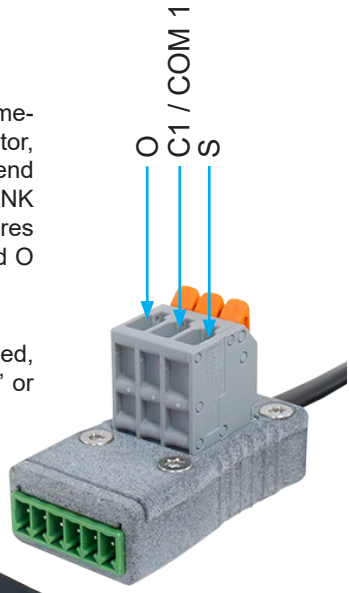

S = blue
O = brown

Copyright by SIMON PROtec Systems GmbH –
Subject to technical changes and errors.