

**Multiple roller over/under (length > 5,960 mm)  
with side guides**


Process No.: \_\_\_\_\_ Agent: \_\_\_\_\_

Successional important technical information to process your order/offer:  
(Please check appropriate)

overall head box length:     ..... up to 12-part  
In brackets the number of the roller assembly.

- 5,961 - 11,482 mm = 4-part (2)     17,005 - 22,527 mm = 8-part (4)     28,050 - 33,572 mm = 12-part (6)  
 11,483 - 17,004 mm = 6-part (3)     22,528 - 28,049 mm = 10-part (5)

\* The position of the cable exit also applies to all further roller assemblies.

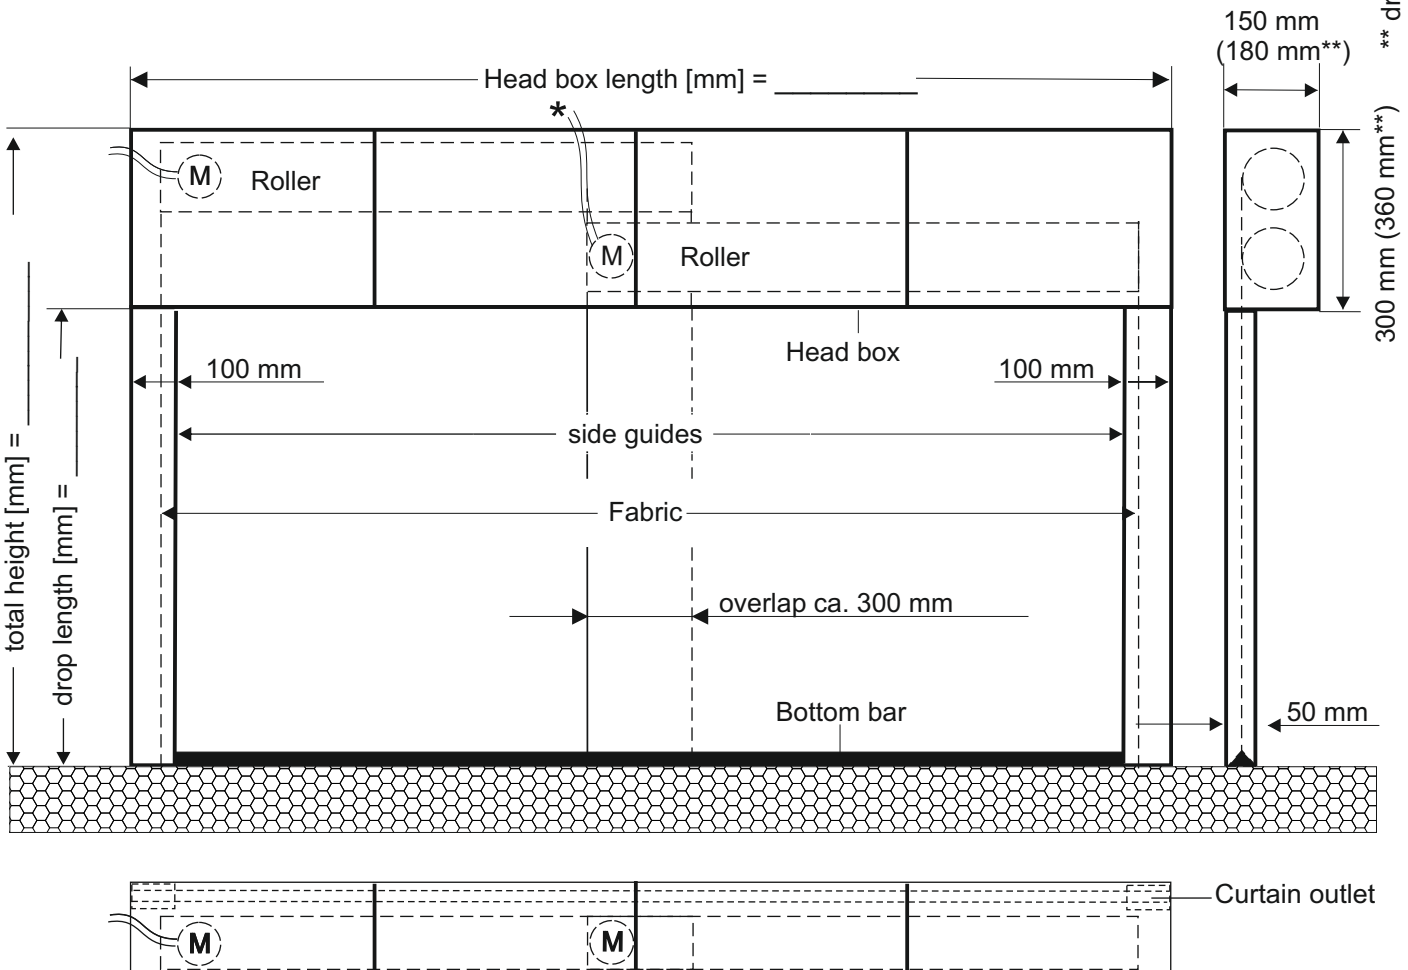

\*\* drop length > 3,000 mm

**Attention!**

The tube motor resp. cable exit for the standard configuration is mounted ex works like printed above.

**Other specifications:**

- Coating in standard RAL 7035 or     Coating in RAL \_\_\_\_\_

(Please check appropriate resp. enter/other fill in colour)

**Packing:**

- Wooden box complete on pallet     Standard parts on pallet