
# Rack-and-pinion actuator EA-SZ 24/80/550



## Technical Data

| | |
|---|---|
| Input voltage | 24 V DC |
| Nominal current | 1 |
| Running speed | 9 |
| IP code | IP55 |
| Switch on duration | 20 |

## MOUNTING POSITIONS

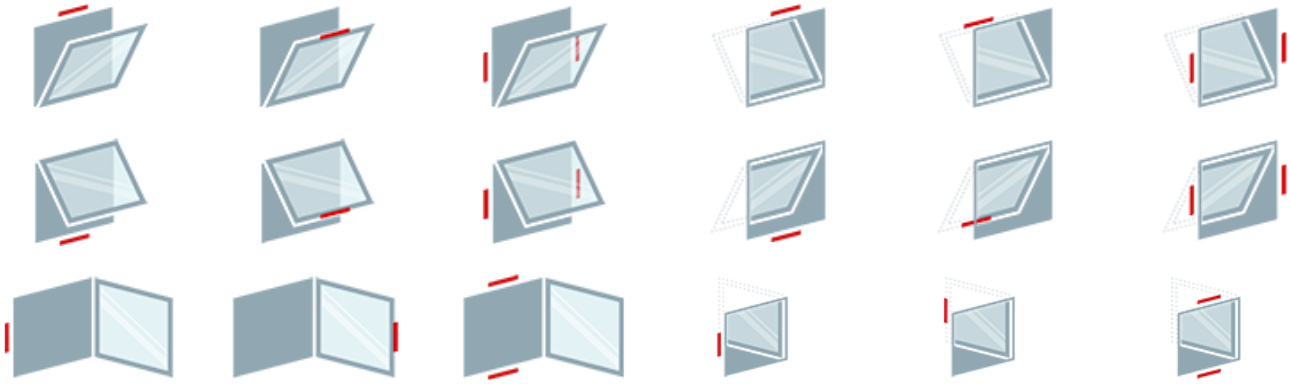

## TECHNICAL DATA

| | |
|---|---|
| Matchcode | EA-SZ 24/80/550 |
| Article name | Rack-and-pinion actuator EA-SZ 24/80/550 |
| Part number | M2 1081 |
| Input voltage | 24 V DC |
| Nominal current | 1 |
| Stroke | 550 |
| Push force | 800 |
| Pull force | 800 |
| Cut-Off | integrated electronic overload cut-off and sequence signal |
| Running speed | 9 |
| IP code | IP55 |
| Switch on duration | 20 |
| Mounting way | aufgesetzt |
| Weight | 2.6 |
| Housing | Rack housing: anodized aluminum E6 / EV1, gray, motor housing: plastic, stroke + 220 mm x 54 x 120 mm |
| Housing type | Aluminium |
| Colour | On request |
| Housing length | 220 |
| Housing width | 54 |
| Housing height | 120 |
| Connection cable | Silicone cable 3 x 0.75 mm², light gray, Length |

# Rack-and-pinion actuator EA-SZ 24/80/550

| | |
|---|---|
| | 1,500 mm |
| Environment temperature range | -10 °C - 60 °C |
| Brackets included | ja |

## ACCESSORIES

| Part no. | Matchcode | |
|---|---|---|
| M2 1083 | EA-SZ-M-350 | |
| M2 1083 A | EA-SZ-VERBIND-1 | |
| M2 1083 B | EA-SZ-VERBIND-2 | |
| M2 1084 | EA-SZ-M-550 | |
| M2 1089 | EA-SZ-M-750 | |
| M2 1091 | EA-SZ-M-1000 | |