




### Technical Data



Input voltage	24 V DC
Nominal current	1.0
Running speed	9.7
IP code	IP32
Switch on duration	30

### MOUNTING POSITIONS

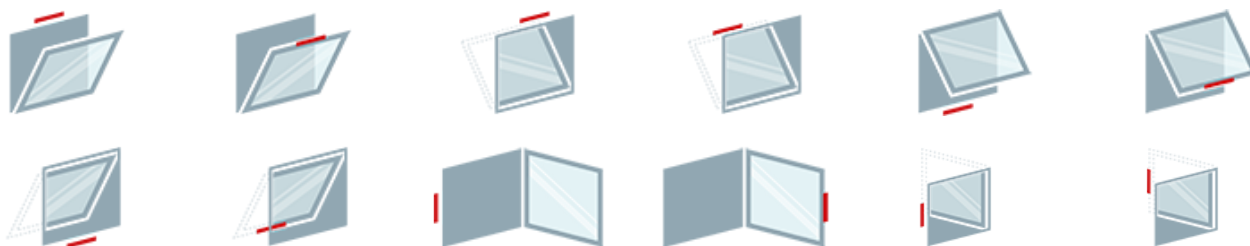

### TECHNICAL DATA

Matchcode	EA-K-30/400-T
Article name	Chain actuator EA-K-30/400-T
Part number	M2 5315
Input voltage	24 V DC
Nominal current	1.0
Input voltage range	- 15 % / + 15 %
Stroke	400
Push force	400
Pull force	400
Nominal locking force	< 3000 N
Cut-Off	Integrated electronic overload cut-off
Running speed	9.7
IP code	IP32
Switch on duration	30
Mounting way	aufgesetzt
Weight	1.3
Housing	Aluminium profile housing EV1 anodized
Housing type	Aluminium
Colour	On request
Housing length	467
Housing width	37
Housing height	35
Appliance class	III
Connection cable	Silicone connection cable 5 x 0.75 mm <sup>2</sup> , not fixed with connector plug (length 3,000 mm)
Nominal working temperature	20
Environment temperature range	-5 °C - 75 °C
Brackets included	nein

**ACCESSORIES**

Part no.	Matchcode	
<a href="#">K2 5089</a>	<a href="#">K-K50-OK</a>	
<a href="#">K2 5097</a>	<a href="#">K-K30-A</a>	
<a href="#">K2 5098</a>	<a href="#">K-K30-K</a>	
<a href="#">K2 5104</a>	<a href="#">K-K30-FLEX</a>	
<a href="#">K2 5105</a>	<a href="#">K-K30-AKI</a>	
<a href="#">K2 5106</a>	<a href="#">K-K-OK-SK</a>	
<a href="#">K2 5107</a>	<a href="#">K-K30-ZB</a>	
<a href="#">K2 5108</a>	<a href="#">K-K30-AKI-R</a>	