




## Technical Data



|                    |         |
|--------------------|---------|
| Input voltage      | 24 V DC |
| Nominal current    | 1.0     |
| Running speed      | 9.7     |
| IP code            | IP32    |
| Switch on duration | 30      |

## MOUNTING POSITIONS

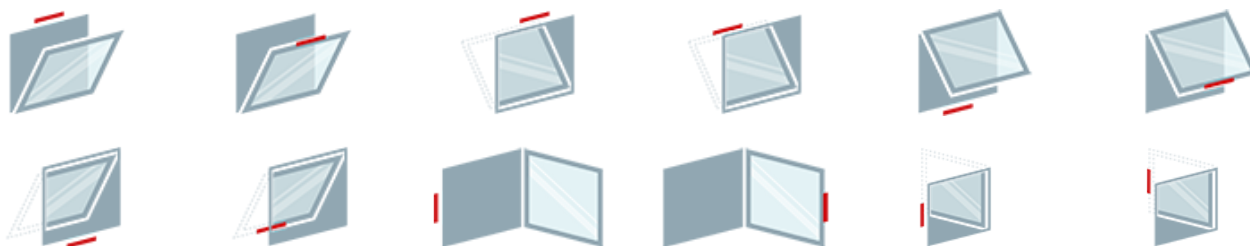

## TECHNICAL DATA

|                               |                                                                                                      |
|-------------------------------|------------------------------------------------------------------------------------------------------|
| Matchcode                     | EA-K-30/1200-T-DA                                                                                    |
| Article name                  | Chain actuator EA-K-30/1200-T-DA                                                                     |
| Part number                   | M2 5319 DA                                                                                           |
| Input voltage                 | 24 V DC                                                                                              |
| Nominal current               | 1.0                                                                                                  |
| Input voltage range           | - 15 % / + 15 %                                                                                      |
| Stroke                        | 1200                                                                                                 |
| Push force                    | 300                                                                                                  |
| Pull force                    | 300                                                                                                  |
| Nominal locking force         | < 3000 N                                                                                             |
| Cut-Off                       | Integrated electronic overload cut-off                                                               |
| Running speed                 | 9.7                                                                                                  |
| IP code                       | IP32                                                                                                 |
| Switch on duration            | 30                                                                                                   |
| Mounting way                  | aufgesetzt                                                                                           |
| Weight                        | 2.3                                                                                                  |
| Housing                       | Aluminium profile housing EV1 anodized                                                               |
| Housing type                  | Aluminium                                                                                            |
| Colour                        | On request                                                                                           |
| Housing length                | 867                                                                                                  |
| Housing width                 | 37                                                                                                   |
| Housing height                | 35                                                                                                   |
| Appliance class               | III                                                                                                  |
| Connection cable              | Silicone connection cable 5 x 0,75 mm <sup>2</sup> , not fixed with connector plug (length 3.000 mm) |
| Nominal working temperature   | 20                                                                                                   |
| Environment temperature range | -5 °C - 75 °C                                                                                        |
| Brackets included             | nein                                                                                                 |
| Packaging part no.            | N-99-124                                                                                             |

### ACCESSORIES

| Part no.                | Matchcode                   |  |
|-------------------------|-----------------------------|--|
| <a href="#">K2 5089</a> | <a href="#">K-K50-OK</a>    |  |
| <a href="#">K2 5097</a> | <a href="#">K-K30-A</a>     |  |
| <a href="#">K2 5098</a> | <a href="#">K-K30-K</a>     |  |
| <a href="#">K2 5104</a> | <a href="#">K-K30-FLEX</a>  |  |
| <a href="#">K2 5105</a> | <a href="#">K-K30-AKI</a>   |  |
| <a href="#">K2 5106</a> | <a href="#">K-K-OK-SK</a>   |  |
| <a href="#">K2 5107</a> | <a href="#">K-K30-ZB</a>    |  |
| <a href="#">K2 5108</a> | <a href="#">K-K30-AKI-R</a> |  |