




Technical Data



Input voltage	230 V AC
Nominal current	0.23
Running speed	9.7
IP code	IP32
Switch on duration	30

MOUNTING POSITIONS

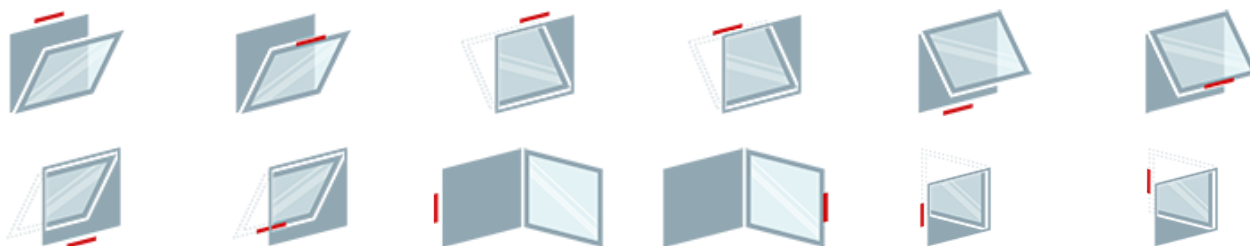

TECHNICAL DATA

Matchcode	EA230-K-30/300-S
Article name	chain actuator EA230-K-30/300-S
Part number	M2 5144
Input voltage	230 V AC
Nominal current	0.23
Input voltage range	- 10 % / + 10 %
Stroke	300
Push force	300
Pull force	300
Nominal locking force	2000
Cut-Off	Integrated electronic overload cut-off
Running speed	9.7
IP code	IP32
Switch on duration	30
Mounting way	aufgesetzt
Weight	0.9
Housing	Aluminium profile housing E6/EV1 anodized
Housing type	Aluminium
Colour	On request
Housing length	468
Housing width	35
Housing height	37
Appliance class	III
Connection cable	plastic connection cable, 5 x 0.5 mm ² , white, length 2.5 m
Nominal working temperature	20
Environment temperature range	0 °C - 75 °C
Brackets included	nein
Packaging part no.	N-99-188

ACCESSORIES

Part no.	Matchcode	
K2 5089	K-K50-OK	
K2 5097	K-K30-A	
K2 5098	K-K30-K	
K2 5104	K-K30-FLEX	
K2 5105	K-K30-AKI	
K2 5106	K-K-OK-SK	
K2 5107	K-K30-ZB	
K2 5108	K-K30-AKI-R	