




**Technical Data**



Input voltage	230 V AC
Nominal current	0.23
Running speed	9.7
IP code	IP32
Switch on duration	30

**MOUNTING POSITIONS**

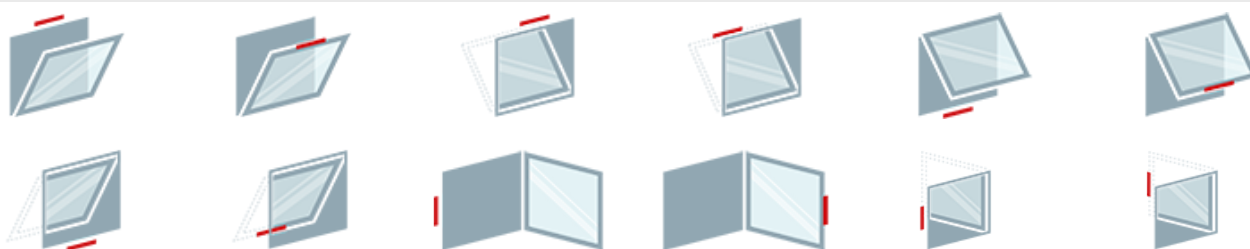

**TECHNICAL DATA**

Matchcode	EA230-K-30/800-S
Article name	chain actuator EA230-K-30/800-S
Part number	M2 5146
Input voltage	230 V AC
Nominal current	0.23
Input voltage range	- 10 % / + 10 %
Stroke	800
Push force	300
Pull force	300
Nominal locking force	2000
Cut-Off	Integrated electronic overload cut-off
Running speed	9.7
IP code	IP32
Switch on duration	30
Mounting way	aufgesetzt
Weight	1.8
Housing	Aluminium profile housing E6/EV1 anodized
Housing type	Aluminium
Colour	On request
Housing length	727
Housing width	35
Housing height	37
Appliance class	III
Connection cable	plastic connection cable, 5 x 0.5 mm <sup>2</sup> , white, length 2.5 m
Nominal working temperature	20
Environment temperature range	0 °C - 75 °C
Brackets included	nein

**ACCESSORIES**

Part no.	Matchcode	
<a href="#">K2 5089</a>	<a href="#">K-K50-OK</a>	
<a href="#">K2 5097</a>	<a href="#">K-K30-A</a>	
<a href="#">K2 5098</a>	<a href="#">K-K30-K</a>	
<a href="#">K2 5104</a>	<a href="#">K-K30-FLEX</a>	
<a href="#">K2 5105</a>	<a href="#">K-K30-AKI</a>	
<a href="#">K2 5106</a>	<a href="#">K-K-OK-SK</a>	
<a href="#">K2 5107</a>	<a href="#">K-K30-ZB</a>	
<a href="#">K2 5108</a>	<a href="#">K-K30-AKI-R</a>	