# Fire curtain Fire PROtec² FSV2-182-SFS-E120

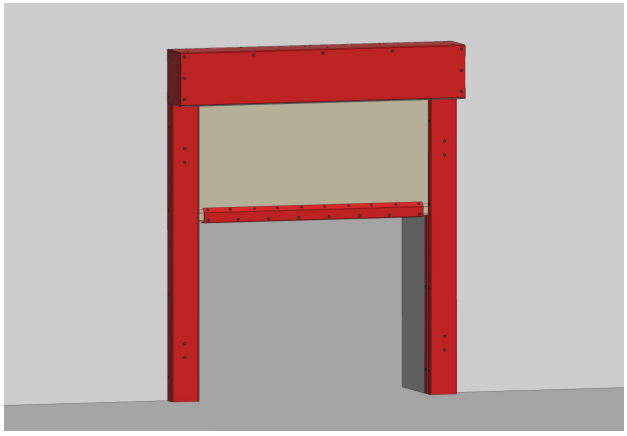

## Technical Data

### TECHNICAL DATA

| | |
|---|---|
| Matchcode | FSV2-182-SFS-E120 |
| Article name | Fire curtain Fire PROtec² FSV2-182-SFS-E120 |
| Part number | FSV2 2001 |
| Classification | E120 EW15 C2 with CE according to DIN EN 16034, VKF approval for Switzerland #31657 |
| Fabric | Fire retardant polyurethane coated e-glass fabric in grey 690 g/m² (A2 \| EN 13501-1) |
| Unwind | descending by gravity (fail safe) |
| Rewind | planetary gear drive, 24 V DC, 3 A with electronic overload cut-off; roll shaft-integrated |
| System installation | Reveal and wall-mounting with appropriate, approved mounting material |
| System size | max. 2800 x 3000 mm (WxH) |
| Housing | Head box (W x H): galvanized sheet steel 1.5 mm (150 x 182 mm, one-piece); Side guides (W x H): Galvanized sheet steel 2 mm (58 x 95 mm) |
| Bottom Bar | Galvanized steel 2 mm with integrated springs and round steel in fabric bag for gravity fail-safe |
| Housing type | Steel case |
| Housing width | 150 |
| Housing height | 182 |

### ACCESSORIES

| Part no. | Matchcode | |
|---|---|---|
| A3 2064 | RM 3000 FSV | |
| A3 2167 | HE-088-YELLOW-ALU | |
| A3 2168 | HE-088-ORANGE-ALU | |
| A3 2178 | HE 087 Yellow FSV | |
| A3 4574 | CT/NA/Rot | |
| ST4 3601 | PROtec-RZ-24 | |
| ST4 3602 | PROtec-RZ-24-SB | |
| ST4 3603 | PROtec-RZ-24-SB-NA | |