

# Linear actuator PA-L-180/500

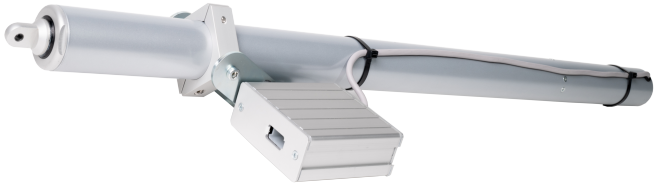

## Technical Data

| | |
|---|---|
| Input voltage | 24 V DC |
| Nominal current | 4 |
| Running speed | 12.5 |
| IP code | IP54 |
| Switch on duration | 30 |

## MOUNTING POSITIONS

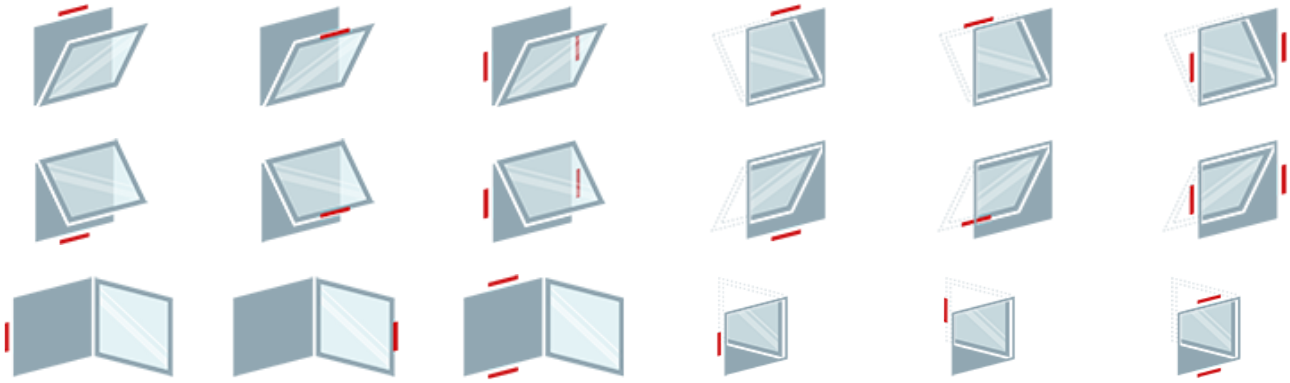

## TECHNICAL DATA

| | |
|---|---|
| Matchcode | PA-L-180/500 |
| Article name | Linear actuator PA-L-180/500 |
| Part number | M2 2442 |
| Input voltage | 24 V DC |
| Nominal current | 4 |
| Input voltage range | - 15 % / + 15 % |
| Networked standby | 0.9 W (1 min) |
| Stroke | 500 |
| Push force | 1800 |
| Pull force | 1800 |
| Nominal locking force | 2200 |
| Cut-Off | external electronic overload cut-off |
| Running speed | 12.5 |
| IP code | IP54 |
| Switch on duration | 30 |
| Mounting way | aufgesetzt |
| Weight | 5.7 |
| Housing | Aluminium profile tube E6/EV1 anodized, with integrated mount for flexible bracket system, length: 416 mm + stroke |
| Housing type | Aluminium |
| Colour | RAL 9006 |
| Housing length | 917 |
| Diameter | 58 |

# Linear actuator PA-L-180/500

| | |
|---|---|
| Appliance class | II |
| Connection cable | SICO PLUG connection. Excluding connection cable / set. |
| Nominal working temperature | 20 |
| Environment temperature range | -5 °C - 75 °C |
| Brackets included | ja |
| Customs tariff no | 84798997 |
| Packaging part no. | N-99-191 |

## ACCESSORIES

| Part no. | Matchcode | |
|---|---|---|
| K2 1501 B | OK-1500 | |
| K2 1585 | K-L-UK-180 | |
| K2 2004 | PA-ANL-3m | |
| K2 2005 | PA-ANL-5m | |
| K2 2006 | PA-ANL-+lfm | |
| K2 2007 | PA-SICO-SET-3m | |
| K2 2008 | PA-SICO-SET-5m | |
| K2 2009 | PA-SICO-SET-+lfm | |
| SD1 8522 | SICO-LINK-Adapter | |
| SD1 8525 | SICO-PLUCKER | |