




Technical Data



| | |
|--------------------|---------|
| Input voltage | 24 V DC |
| Nominal current | 1.4 |
| Running speed | 11 |
| IP code | IP32 |
| Switch on duration | 30 |

MOUNTING POSITIONS

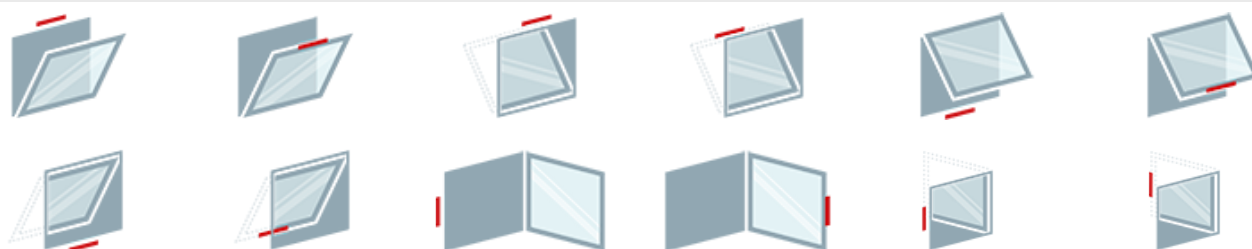

TECHNICAL DATA

| | |
|-------------------------------|----------------------------------------------------------------------|
| Matchcode | PA-K-50/1200-S |
| Article name | Kettenantrieb PA-K-50/1200-S |
| Part number | M2 2235 S |
| Input voltage | 24 V DC |
| Nominal current | 1.4 |
| Input voltage range | - 15 % / + 15 % |
| Stroke | 1200 |
| Push force | 500 |
| Pull force | 500 |
| Nominal locking force | < 3000 N |
| Cut-Off | Integrated electronic overload cut-off |
| Running speed | 11 |
| IP code | IP32 |
| Switch on duration | 30 |
| Mounting way | aufgesetzt |
| Weight | 3.1 |
| Housing | Aluminium profile housing EV1 anodized |
| Housing type | Aluminium |
| Colour | On request |
| Housing length | 927 |
| Housing width | 50 |
| Housing height | 41 |
| Appliance class | III |
| Connection cable | Silicone connection cable 3 x 0.75 mm ² (length 3,000 mm) |
| Nominal working temperature | 20 |
| Environment temperature range | -5 °C - 75 °C |
| Brackets included | nein |

Customs tariff no

84798997

ACCESSORIES

| Part no. | Matchcode |
|--------------------------|-----------------------------------|
| K2 5088 | K-K50-SKI |
| K2 5089 | K-K50-OK |
| K2 5090 | K-K50-AKI |
| K2 5092 | K-K50-A |
| K2 5093 | K-K50-K |
| K2 5094 | K-K50-FLEX |
| K2 5106 | K-K-OK-SK |
| SD1 8513 | SICO-LINK-USB-110 |
| SD1 8522 | SICO-LINK-Adapter |
| SD1 8525 | SICO-PLUCKER |