

# Linear actuator PA-L-50/750_copy

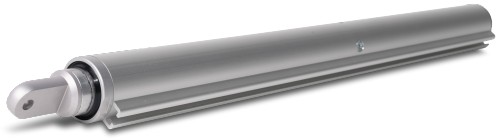

## Technical Data

| | |
|---|---|
| Input voltage | 24 V DC |
| Nominal current | 1.1 |
| Running speed | 7.6 |
| IP code | IP54 |
| Switch on duration | 30 |

## MOUNTING POSITIONS

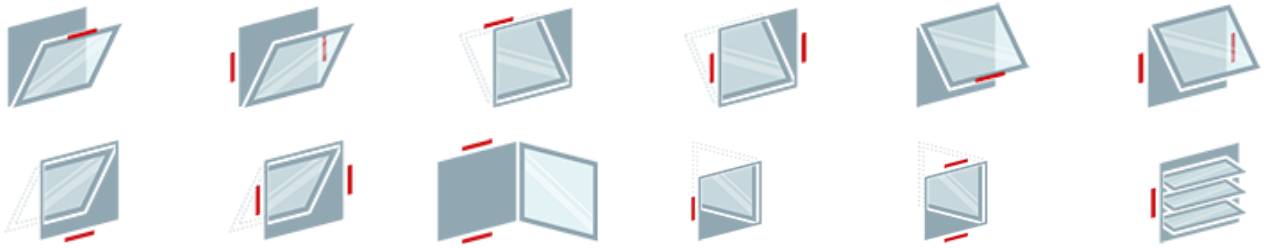

## TECHNICAL DATA

| | |
|---|---|
| Matchcode | PA-L-75/750 |
| Article name | Linear actuator PA-L-50/750_copy |
| Part number | M2 2414 |
| Input voltage | 24 V DC |
| Nominal current | 1.1 |
| Input voltage range | - 15 % / + 15 % |
| Networked standby | 0.9 W (1 min) |
| Stroke | 750 |
| Push force | 750 |
| Pull force | 750 |
| Nominal locking force | 1000 |
| Cut-Off | integrated electronic overload cut-off |
| Running speed | 7.6 |
| IP code | IP54 |
| Switch on duration | 30 |
| Mounting way | aufgesetzt |
| Weight | 2.85 |
| Housing | end-to-end aluminium profile tube, anodized in E6/EV1 with integrated retainer for flexible bracket system |
| Housing type | Aluminium |
| Colour | On request |
| Housing length | 1137 |
| Housing height | 42 |
| Diameter | 36 |
| Appliance class | III |
| Connection cable | SICO PLUG connection. Excluding connection cable / set. |

# Linear actuator PA-L-50/750_copy

| | |
|---|---|
| Nominal working temperature | 20 |
| Environment temperature range | -5 °C - 75 °C |
| Brackets included | nein |
| Customs tariff no | 84798997 |
| Packaging part no. | N-99-145 |

## ACCESSORIES

| Part no. | Matchcode |
|---|---|
| K2 1501 | OK |
| K2 1502 | DAS |
| K2 1505 A | UKU-740 |
| K2 1506 | AW 100-6 |
| K2 1506 A | AW 100-6-A |
| K2 1507 A | AW 150-6 |
| K2 1507 B | AW 150-6-A |
| K2 1519 A | AW 250-6 |
| K2 1539 | HK-L |
| K2 1562 | UK-L |
| K2 1563 | K-L-UK-J |
| K2 2004 | PA-ANL-3m |
| K2 2005 | PA-ANL-5m |
| K2 2006 | PA-ANL-+lfm |
| K2 2007 | PA-SICO-SET-3m |
| K2 2008 | PA-SICO-SET-5m |
| K2 2009 | PA-SICO-SET-+lfm |
| SD1 8522 | SICO-LINK-Adapter |
| SD1 8525 | SICO-PLUCKER |