


## Technical Data



Input voltage	230 V AC
Nominal current	0.15
Running speed	8
IP code	IP32
Switch on duration	30

## MOUNTING POSITIONS

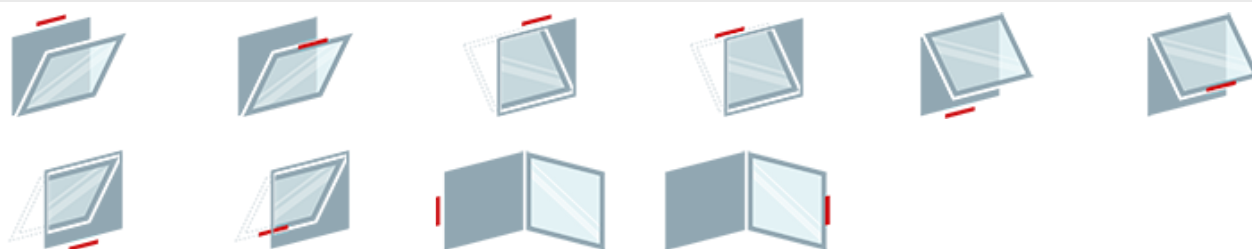

## TECHNICAL DATA

Matchcode	EA230-K-50/1000-S
Article name	Chain actuator EA230-K-50/1000-S
Part number	M2 5163 S
Input voltage	230 V AC
Nominal current	0.15
Input voltage range	- 10 % / + 10 %
Stroke	1000
Push force	500
Pull force	500
Nominal locking force	700
Cut-Off	integrated electronic load cut-off
Running speed	8
IP code	IP32
Switch on duration	30
Mounting way	aufgesetzt
Weight	2.5
Housing	Aluminium profile housing E6/EV1 anodized
Housing type	Aluminium
Colour	On request
Housing length	940
Housing width	50
Housing height	41
Appliance class	II
Connection cable	Silicone connection cable 5 x 0.75 mm <sup>2</sup> (length 3,000 mm)
Nominal working temperature	20
Environment temperature range	-5 °C - 75 °C
Brackets included	nein

**ACCESSORIES**

Part no.	Matchcode	
<a href="#">K2 5088</a>	<a href="#">K-K50-SKI</a>	
<a href="#">K2 5089</a>	<a href="#">K-K50-OK</a>	
<a href="#">K2 5090</a>	<a href="#">K-K50-AKI</a>	
<a href="#">K2 5092</a>	<a href="#">K-K50-A</a>	
<a href="#">K2 5093</a>	<a href="#">K-K50-K</a>	
<a href="#">K2 5094</a>	<a href="#">K-K50-FLEX</a>	
<a href="#">K2 5106</a>	<a href="#">K-K-OK-SK</a>	