


## Technical Data



|                    |          |
|--------------------|----------|
| Input voltage      | 230 V AC |
| Nominal current    | 0.15     |
| Running speed      | 8        |
| IP code            | IP32     |
| Switch on duration | 30       |

## MOUNTING POSITIONS

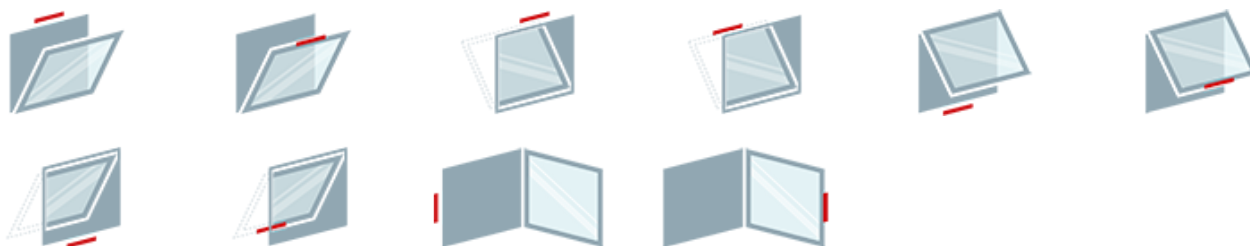

## TECHNICAL DATA

|                               |                                                                      |
|-------------------------------|----------------------------------------------------------------------|
| Matchcode                     | EA230-K-50/1200-S                                                    |
| Article name                  | Chain actuator EA230-K-50/1200-S                                     |
| Part number                   | M2 5164 S                                                            |
| Input voltage                 | 230 V AC                                                             |
| Nominal current               | 0.15                                                                 |
| Input voltage range           | - 10 % / + 10 %                                                      |
| Stroke                        | 1000                                                                 |
| Push force                    | 500                                                                  |
| Pull force                    | 500                                                                  |
| Nominal locking force         | 700                                                                  |
| Cut-Off                       | integrated electronic load cut-off                                   |
| Running speed                 | 8                                                                    |
| IP code                       | IP32                                                                 |
| Switch on duration            | 30                                                                   |
| Mounting way                  | aufgesetzt                                                           |
| Weight                        | 2.5                                                                  |
| Housing                       | Aluminium profile housing E6/EV1 anodized                            |
| Housing type                  | Aluminium                                                            |
| Colour                        | On request                                                           |
| Housing length                | 1040                                                                 |
| Housing width                 | 50                                                                   |
| Housing height                | 41                                                                   |
| Appliance class               | II                                                                   |
| Connection cable              | Silicone connection cable 5 x 0.75 mm <sup>2</sup> (length 3,000 mm) |
| Nominal working temperature   | 20                                                                   |
| Environment temperature range | -5 °C - 75 °C                                                        |
| Brackets included             | nein                                                                 |
| Packaging part no.            | N-99-139                                                             |

### ACCESSORIES

| Part no.                | Matchcode                  |  |
|-------------------------|----------------------------|--|
| <a href="#">K2 5088</a> | <a href="#">K-K50-SKI</a>  |  |
| <a href="#">K2 5089</a> | <a href="#">K-K50-OK</a>   |  |
| <a href="#">K2 5090</a> | <a href="#">K-K50-AKI</a>  |  |
| <a href="#">K2 5092</a> | <a href="#">K-K50-A</a>    |  |
| <a href="#">K2 5093</a> | <a href="#">K-K50-K</a>    |  |
| <a href="#">K2 5094</a> | <a href="#">K-K50-FLEX</a> |  |
| <a href="#">K2 5106</a> | <a href="#">K-K-OK-SK</a>  |  |