


## Technical Data



Input voltage	24 V DC
Nominal current	1.0
Running speed	7.7
IP code	IP54
Switch on duration	30

## MOUNTING POSITIONS

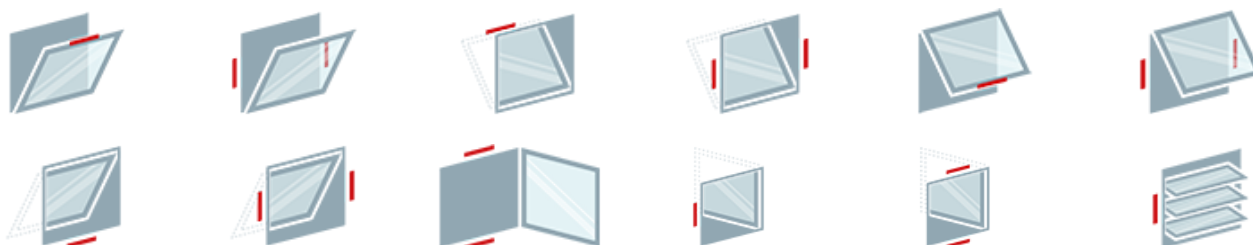

## TECHNICAL DATA

Matchcode	PA-L-50/500-S
Article name	Linear actuator PA-L-50/500-S
Part number	M2 2403 S
Input voltage	24 V DC
Nominal current	1.0
Input voltage range	- 15 % / + 15 %
Stroke	500
Push force	500
Pull force	500
Nominal locking force	1000
Cut-Off	electronic and sequence signal "F"
Running speed	7.7
IP code	IP54
Switch on duration	30
Mounting way	aufgesetzt
Weight	2.2
Housing	end-to-end aluminium profile tube, anodized in EV1
Housing type	Aluminium
Colour	On request
Housing length	887
Housing height	42
Diameter	36
Appliance class	III
Connection cable	SICO PLUG connection. Excluding connection cable / set.
Nominal working temperature	20
Environment temperature range	-5 °C - 75 °C

Brackets included  
Customs tariff no

nein  
84798997

**ACCESSORIES**

Part no.	Matchcode
<a href="#">K2 1501</a>	<a href="#">OK</a>
<a href="#">K2 1502</a>	<a href="#">DAS</a>
<a href="#">K2 1505 A</a>	<a href="#">UKU-740</a>
<a href="#">K2 1506</a>	<a href="#">AW 100-6</a>
<a href="#">K2 1506 A</a>	<a href="#">AW 100-6-A</a>
<a href="#">K2 1507 A</a>	<a href="#">AW 150-6</a>
<a href="#">K2 1507 B</a>	<a href="#">AW 150-6-A</a>
<a href="#">K2 1519 A</a>	<a href="#">AW 250-6</a>
<a href="#">K2 1539</a>	<a href="#">HK-L</a>
<a href="#">K2 1562</a>	<a href="#">UK-L</a>
<a href="#">K2 1563</a>	<a href="#">K-L-UK-J</a>
<a href="#">K2 1576</a>	<a href="#">K-L-RAICO105D-RE-9006 (rechts)</a>
<a href="#">K2 1577</a>	<a href="#">K-L-RAICO105D-LI-9006 (links)</a>
<a href="#">K2 1601</a>	<a href="#">K-L-A-LI-AW57RO</a>
<a href="#">K2 1603</a>	<a href="#">K-L-A-RE-AW57RO</a>
<a href="#">K2 2004</a>	<a href="#">PA-ANL-3m</a>
<a href="#">K2 2005</a>	<a href="#">PA-ANL-5m</a>
<a href="#">K2 2006</a>	<a href="#">PA-ANL-+lfm</a>
<a href="#">K2 2007</a>	<a href="#">PA-SICO-SET-3m</a>
<a href="#">K2 2008</a>	<a href="#">PA-SICO-SET-5m</a>
<a href="#">K2 2009</a>	<a href="#">PA-SICO-SET-+lfm</a>
<a href="#">SD1 8522</a>	<a href="#">SICO-LINK-Adapter</a>
<a href="#">SD1 8525</a>	<a href="#">SICO-PLUCKER</a>