


Technical Data



Input voltage	24 V DC
Nominal current	2.6
Running speed	14.8
IP code	IP54
Switch on duration	30

MOUNTING POSITIONS

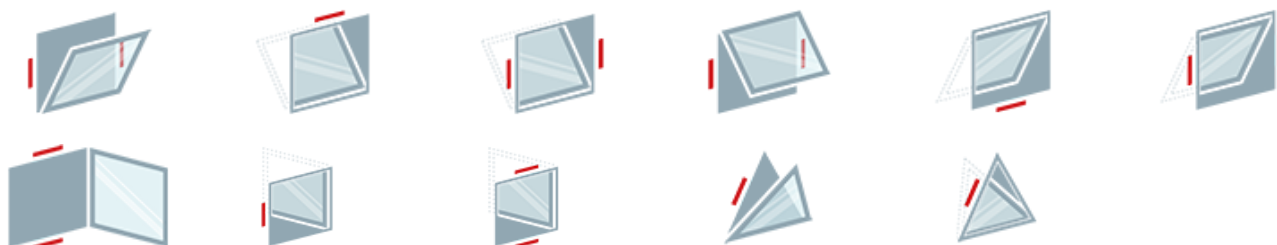

TECHNICAL DATA

Matchcode	PA-KL ² -80/710
Article name	Folding Arm ² PA-KL ² -80/710
Part number	M2 2002
Input voltage	24 V DC
Nominal current	2.6
Input voltage range	- 15 % / + 25 %
Ripple	500
Stroke	710
Push force	800
Pull force	500
Nominal locking force	1200
Classification	EN 12101-2, EN 60335-1, EN 60335-2-103
Cut-Off	Integrated overload cut-off with microprocessor controls
Running speed	14.8
IP code	IP54
Switch on duration	30
Mounting way	aufgesetzt
Weight	5.5
Housing	Aluminum
Housing type	Aluminium
Colour	Alu E6/EV1
Housing length	500
Housing width	58
Housing height	122
Appliance class	III
Connection cable	SICO PLUG (Excluding connection cable / set)
Nominal working temperature	20

Environment temperature range
Brackets included

-5 °C - 75 °C
nein

ACCESSORIES

Part no.	Matchcode
K2 1608	K-KL²-M-OK
K2 1609	K-KL²-S-OK
K2 1617	Z-K-KL-DP25
K2 1680	Z-K-KL2-DP5
K2 1681	Z-K-KL2-DP10
K2 1682	Z-K-KL2-DP17
K2 1683	Z-K-KL2-DP22
K2 2001	SICO-PLUG
K2 2002	SICO-PLUG-SP
K2 2003	PA-ANL-SIHF-6x0,5mm²
K2 2004	PA-ANL-3m
K2 2005	PA-ANL-5m
K2 2006	PA-ANL-+lfm
K2 2007	PA-SICO-SET-3m
K2 2008	PA-SICO-SET-5m
K2 2009	PA-SICO-SET-+lfm
SD1 8513	SICO-LINK-USB-110
SD1 8514	SICO-PLUG-INSTALL
SD1 8522	SICO-LINK-Adapter
SD1 8525	SICO-PLUCKER
SD1 8530	Software parameterization